

# 3UVIEW

## ***VST-B Taxi Double-Sided LED Screen Installation Instruction***



### **Contact Us:**

ShenZhen 3u view CO., LTD

Address: Building B, Zhuoke Science and Technology Park, No. 190, Chongqing Road,  
Fuhai Street, Baoan District, Shenzhen, Guangdong, China

Website: [www.3uview.com](http://www.3uview.com)

# ***Catalog***

<i>VST-B Taxi Double-Sided LED Screen</i> .....	1
Preparation After Receiving the Product .....	2
1. Installation Accessories .....	5
2. Installation the tools .....	5
3. Installation steps .....	6
4. Precautions .....	9

## Preparation After Receiving the Product

1. Prepare a 220V/110V to 12V transformer




2. Prepare an activated SIM card and insert it into the SIM card slot of the system card




3. Light up the LED screen through the transformer




## 4. Download the LEDOK software to match the APN

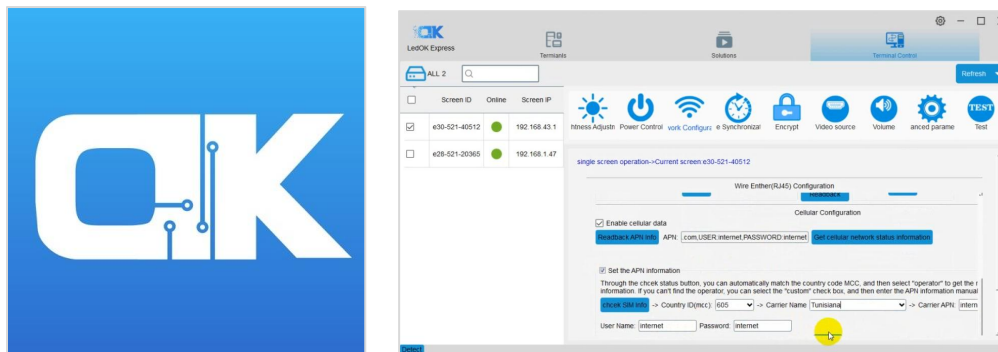

## 5. Log in to the computer advertising publishing platform to check whether the LED screen is online normally

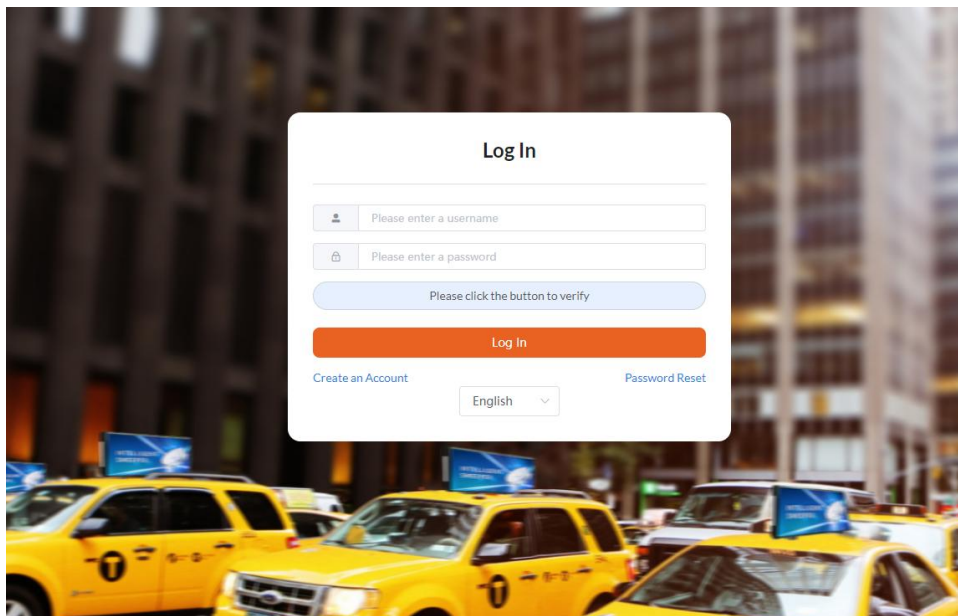

## 6. Upload and publish advertising content

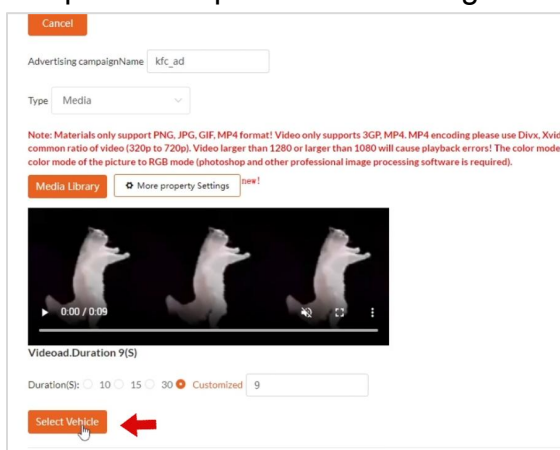





# 3UVIEW






7. Install the LED screen on the vehicle



## 1. Installation Accessories


Order	Name	quantity	Graphic	Explain
1	Mounting bracket	1		Aluminum alloy, bearing 100kg
2	Install fixtures	2		Secure the LED vehicle screen and the mounting bracket
3	Nut	4		Lock the power cord "+, -"
4	External power cord	1		Main power line: 6mm <sup>2</sup> *2+0.75mm <sup>2</sup> * 1 pure copper cable (ensure adequate allowance and safety), total length of 5 meters

## 2. Installation the tools

				
scissors	multimeter	T10 wrench	T30 wrench	Phillips screwdriver



## 3. Installation steps

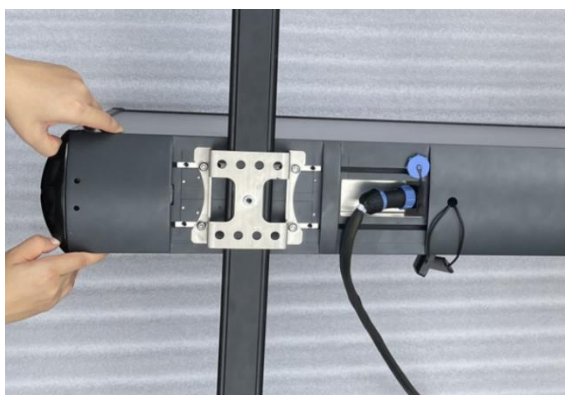

Install luggage rack All accessories

1. 2 luggage rack brackets.
2. 4 sets of hooks suitable for different car bodies.
3. 4 hook pads.
4. 4 nuts

1. Put a protective layer on the bottom.
2. Place the double-sided screen with the bottom facing up.
3. Unscrew the screws around the anti-theft firmware at the bottom of the double-sided screen.
4. Place the luggage rack bracket with the bottom facing upwards and place it so that the lengths on both sides are the same.
5. Tighten the screws on the anti-theft fastener at the bottom of the double-sided screen.
6. Repeat this step on the other side.

1. Align the white dot of the power cord with the white dot of the socket at the bottom of the double-sided screen.
2. Tighten after the white dots are aligned with the white dots.

# 3UVIEW



1. Turn the double-sided screen over, lift it up and place it on the roof of the car.
2. Align the edges of the body.



1. Paste the gasket underneath the hook of the luggage rack to prevent scratching the car body.
2. Repeat this step for the other four hooks.
3. Place the hook into the luggage rack base.



1. Pass the nut through the hook and tighten it against the nut inside.
2. Turn the key of the nut to ON to complete the locking.



# 3UVIEW




1. After locking, the nut can be moved when tightened again, but it cannot be screwed out.
2. Remove the key.
3. Repeat this step for the remaining four weeks.



1. Secure the power cord with a tie.
2. 4G antenna/GPS antenna needs to be fixed upward. The farther away from the screen, the better the signal reception.



1. According to the wiring of the car body, black glue can be used to fix it at the back.

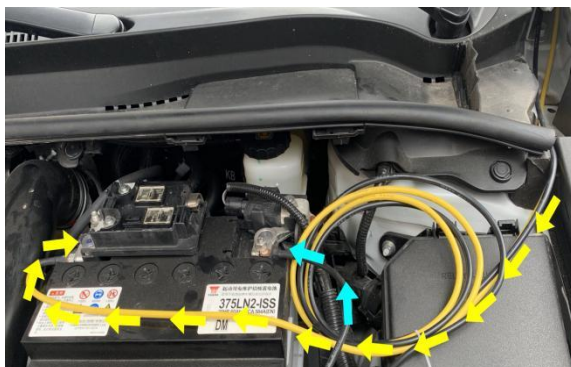

1. Yellow is the positive pole and black is the

# 3UVIEW



1. The white line is the ACC line. Access to the cigarette lighter location.



1. After all the wires are connected, you can light up the test.

## 4. Precautions

1. When installing the product, first check the integrity of the accessories to see if any are missing or damaged during transportation.
2. Find the vehicle's fuse box and confirm the wiring path and wiring location.
3. Pay attention to the firmness of the wire ends when wiring, and be sure to tighten them.
4. The bottom mounting hardware must be screwed in place to prevent the vehicle from falling off due to vibration during operation, causing safety hazards.
5. The 4G/GPS antenna should be farther away from the screen to avoid affecting signal reception.
6. Be careful when installing to avoid the LED car screen from falling and being damaged.
7. When installing, be careful not to damage the car body and car screen with the installation tools.
8. Keep personnel clean during installation to prevent contamination of the vehicle screen and affect the display effect.
9. Record the license plate number corresponding to the ID number on the screen to facilitate later maintenance and application.

